


FOR THE DOOR INSTALLATION
PLEASE CONSULT THE
INSTALLATION MANUAL

PROTECTION OF THE
COMPARTMENT: NORM
UNI-EN-ISO-13857:2008
FOR PROTECTION WITH
METALLIC GRID, USE
A COMPACT MESH 12x12mm

TECHNICAL AREA
AT FLOOR "0"

PREPARE CORRUGATED
TUBE Ø10cm TO THE
TECHNICAL AREA

MAX DISTANCE
FROM GOODSPLIT TO
TECHNICAL AREA 4MT
(L. standard tube = 6 mt)

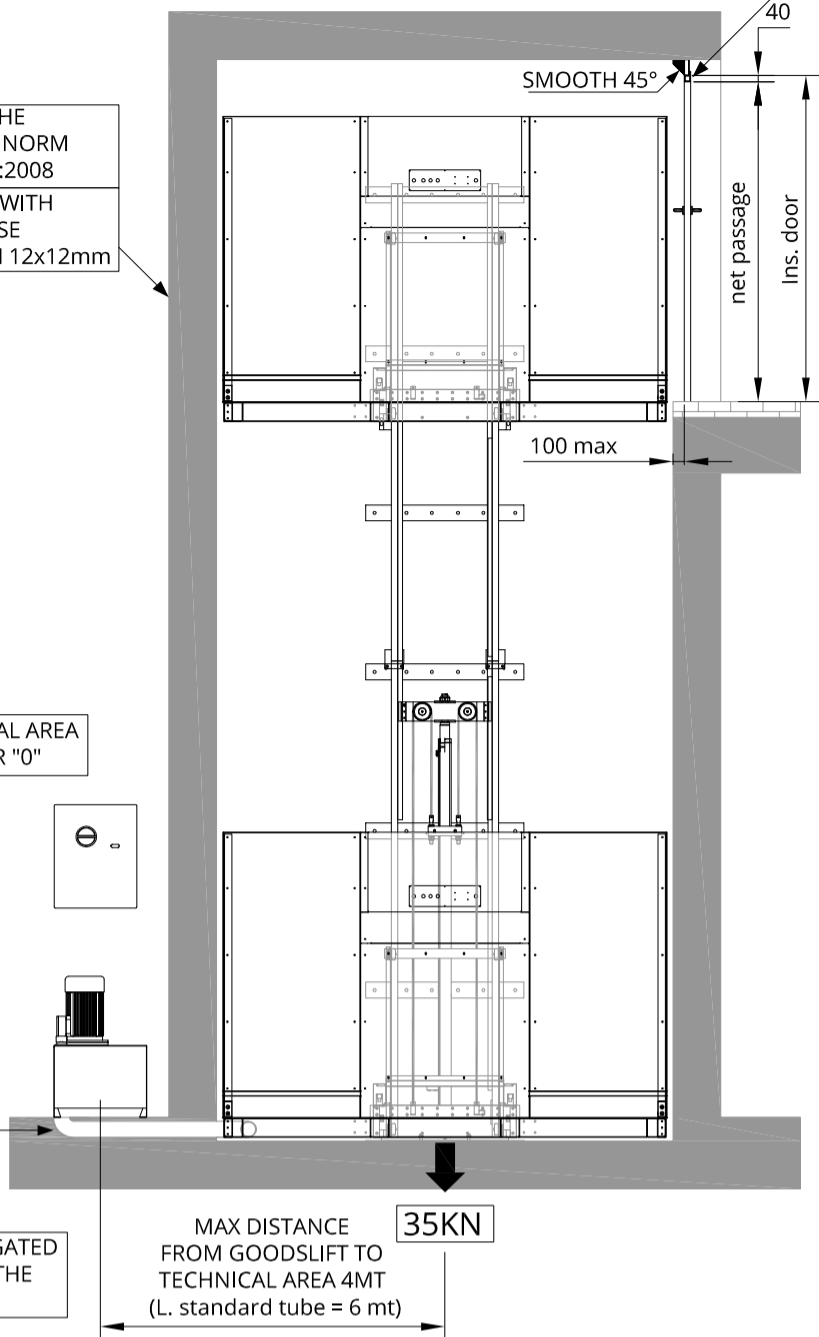

WALL IN CONCRETE CLASS 20/25
Standard fixing: Anchor mod. Fischer FBN II 16/50 (16x170)

23KN (Fx)

23KN (Fx)


23KN (Fx)

23KN (Fx)

35KN

CONCRETE
CLASS 20/25


150 EXTRAPIT
REAL PIT:

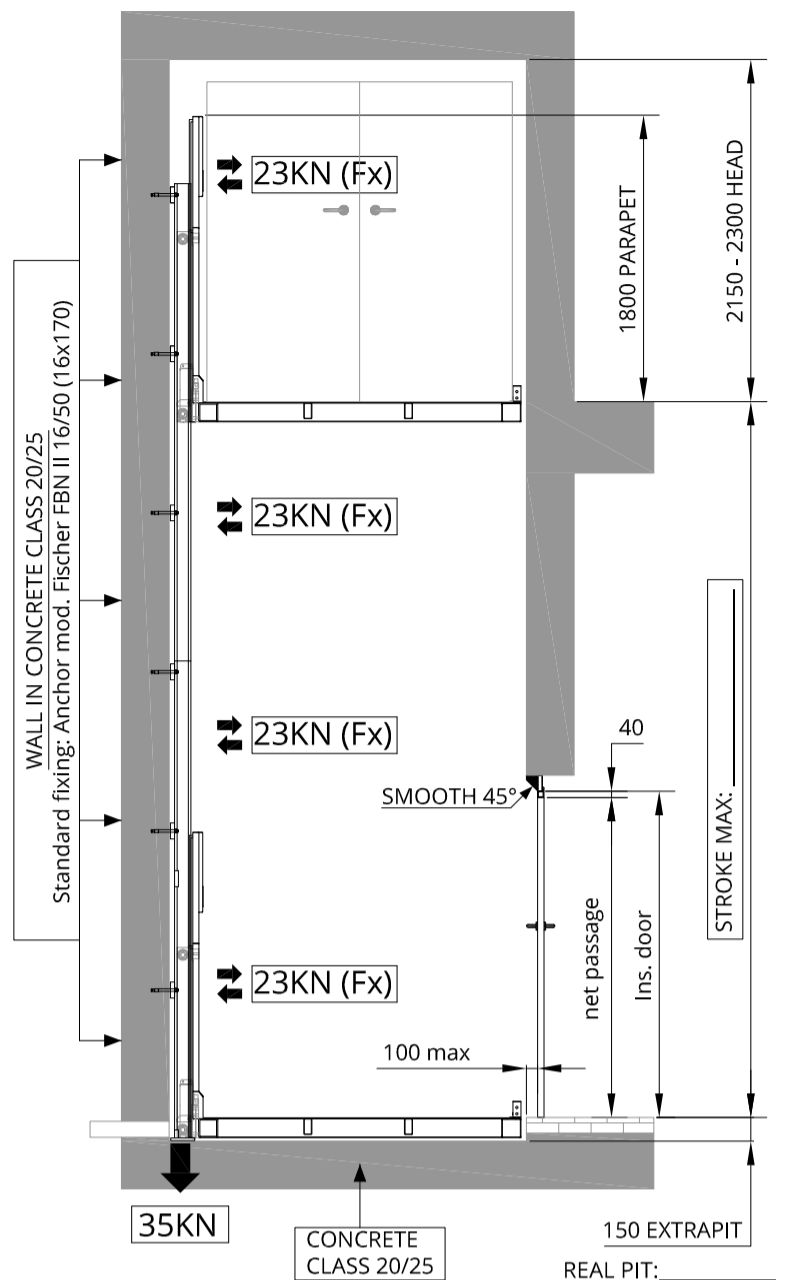

PREPARE CORRUGATED TUBE
Ø10cm TO THE TECHNICAL AREA


PREPARE TUBULAR 100x30 FLUSH
WITH THE GOODSPLIT ROOM
Only for standard door application

TECHNICAL AREA

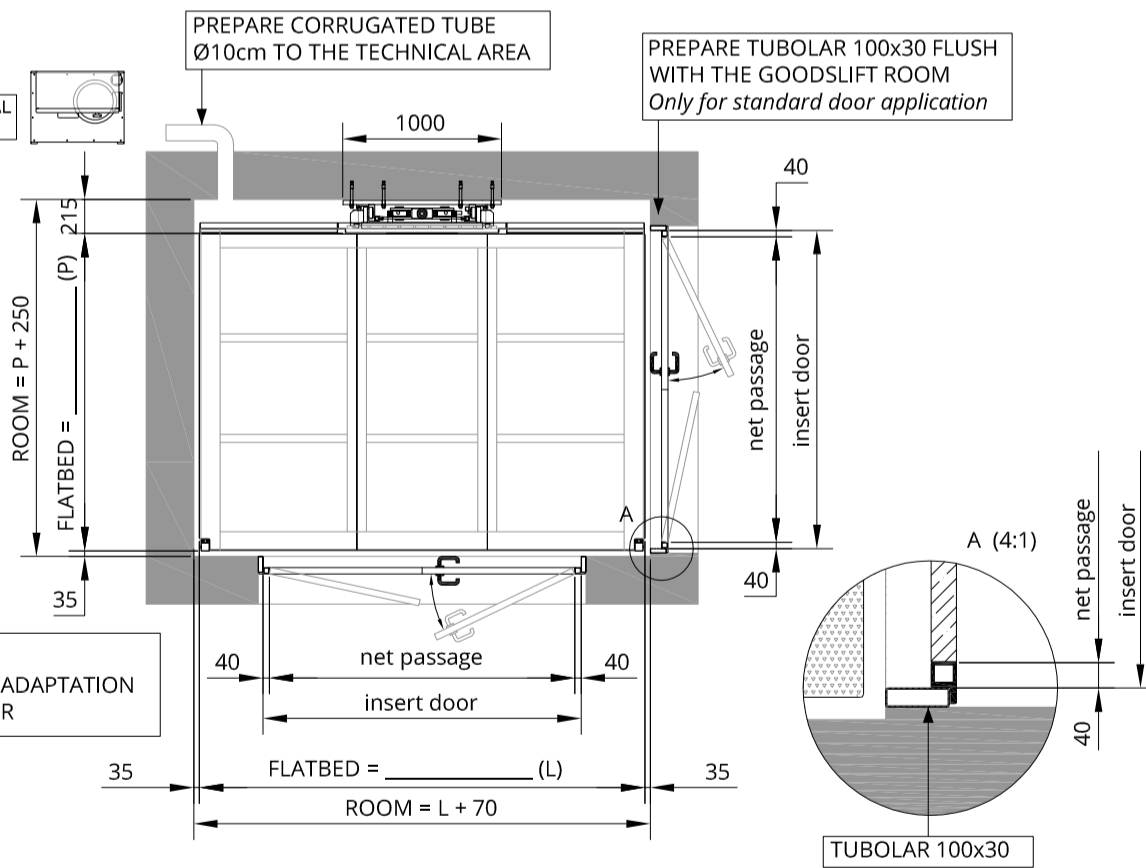

NOTE:
THRESHOLD ADAPTATION
BY CUSTOMER

MARK THE ENTRANCES AND THE HEIGHT OF FLOOR

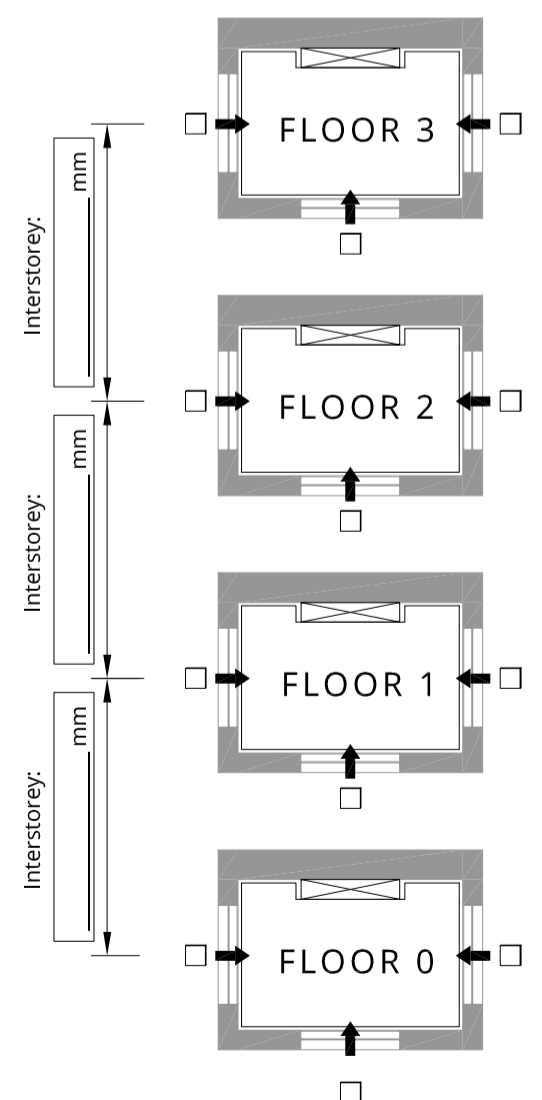

Motore	Tensione funzionamento	Avviamento	Interruttore consigliato*	Corrente nominale	Corrente avviamento
3kW	220 V - trifase	Diretto	3x16A id=0,3A	10	35
	380 V - trifase	Diretto	4x16A id=0,3A	5	22
4kW	220 V - trifase	Diretto	3x20A id=0,3A	16	50
	380 V - trifase	Diretto	4x16A id=0,3A	8	25
5,5kW	220 V - trifase	Diretto	4x25A id=0,3A	22	60
	380 V - trifase	Diretto	4x16A id=0,3A	11	35


MODEL: UP10 - 1000Kg UP15 - 1500Kg

Date: _____ Signature for approval: _____




MISURE IN mm

FLATBED DIMENSION (grey area)

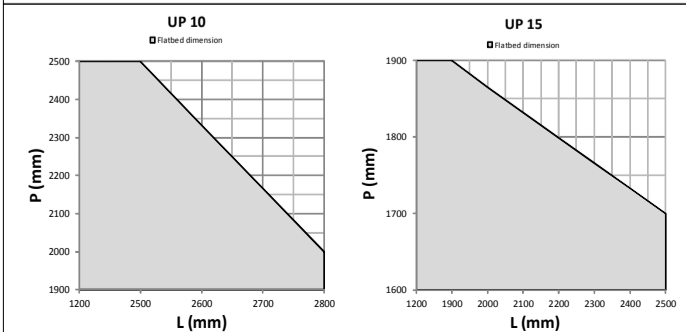

Force on the wall, Fx function of depth flatbed

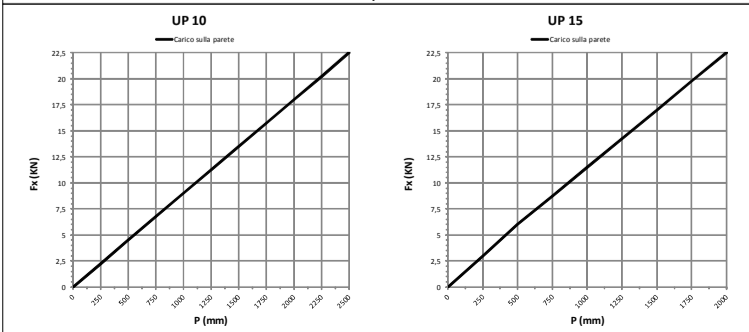

UP DINAMIC Via Modigliani, 22 - 37045 Legnago (VR) - Tel. 0442.59.01.29 - Fax. 0442.59.90.91
www.updinamic.com - e-mail: info@updinamic.com

Q.TA DESCRIZIONE: MODEL: UP10 - 1000Kg
UP15 - 1500Kg
STROKE MAX: 12000mm
WITH OPERATOR ON BOARD

Cliente: _____
Uscigrafo: _____ Data: 07/11/14
Disegno n°: _____
TAV-UP1015-SPB01
Sostituito da: _____
Sostituisce il: _____

Fornita Foglio Scale A3