



PREPARE POWER 3F+T+N SWITCH AUTOMATIC MAGNETOTHERMIC WITH DIFFERENTIAL CURVE "C", Id = 0.3A

Motor	Tension-functioning	Starter	Suggested switch*	Rated current	Current starter
3kW	220 V - 3ph	Direct	3x16A id=0,3A	10	35
	380 V - 3ph	Direct	4x16A id=0,3A	5	22
4kW	220 V - 3ph	Direct	3x20A id=0,3A	16	50
	380 V - 3ph	Direct	4x16A id=0,3A	8	25
5,5kW	220 V - 3ph	Direct	4x25A id=0,3A	22	60
	380 V - 3ph	Direct	4x16A id=0,3A	11	35

MODEL: UP15RT - 1500Kg UP20RT - 2000Kg

Date: _____ Signature for approval: _____

MISURE IN mm

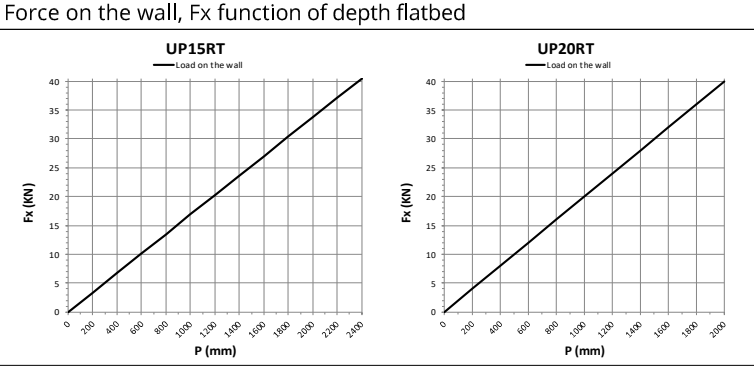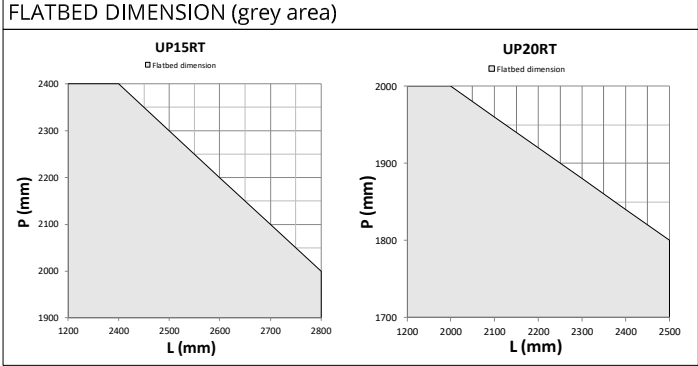

UPDINAMIC Via Modigliani, 22 - 37045 Legnago (VR) - Tel. 0442.59.01.29 - Fax. 0442.59.90.91
www.updinaric.com - e-mail: info@updinaric.com

Q.TA DESCRIZIONE: MODEL: UP15-20RT


STROKE MAX: 12000mm
ONLY FOR GOODS

Cliente: _____
Data: 10/09/19




Disegno n°: TAV-UP15-20RT-STD01

Sostituto del: _____
Sostitutore di: _____


Formule Foglio A3 Scale

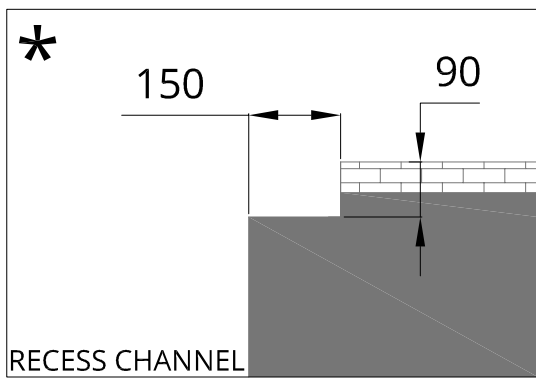

* Predisposition recess channel provided by the customer

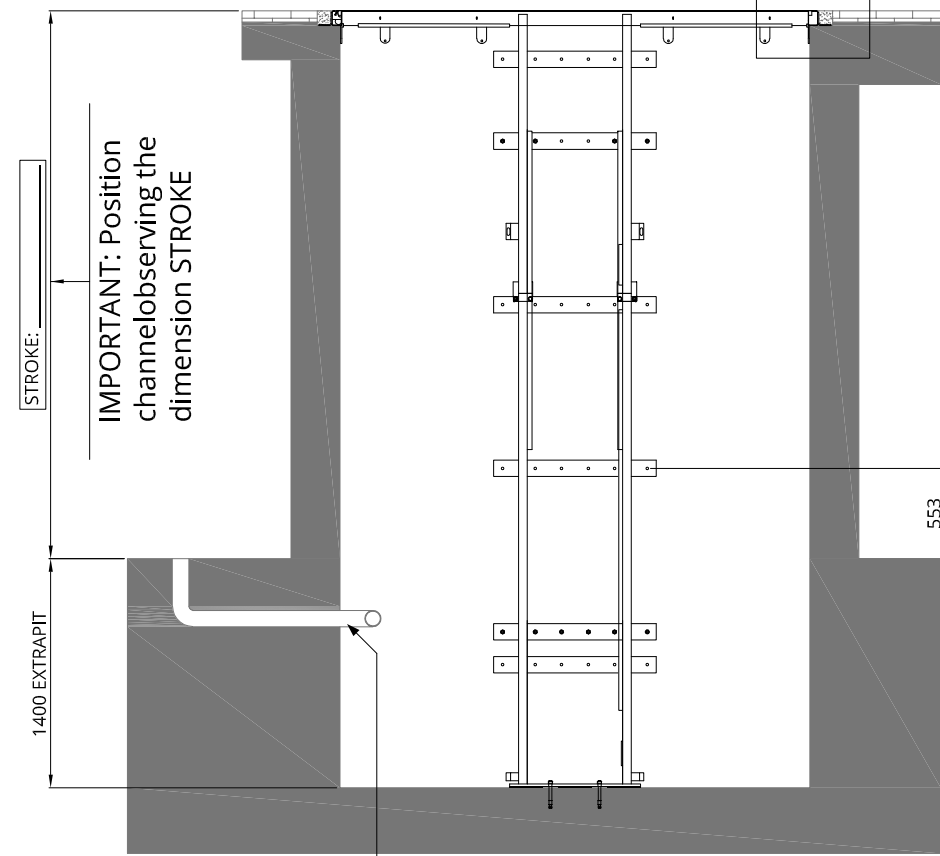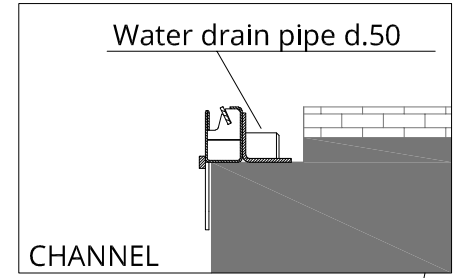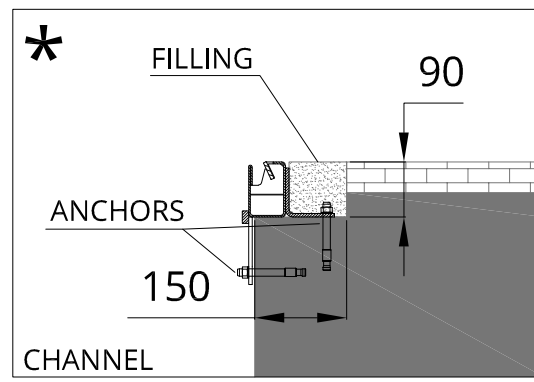


IMPORTANT: Position guides observing the dimension indicated by the channel and check 573 from the downstairs level

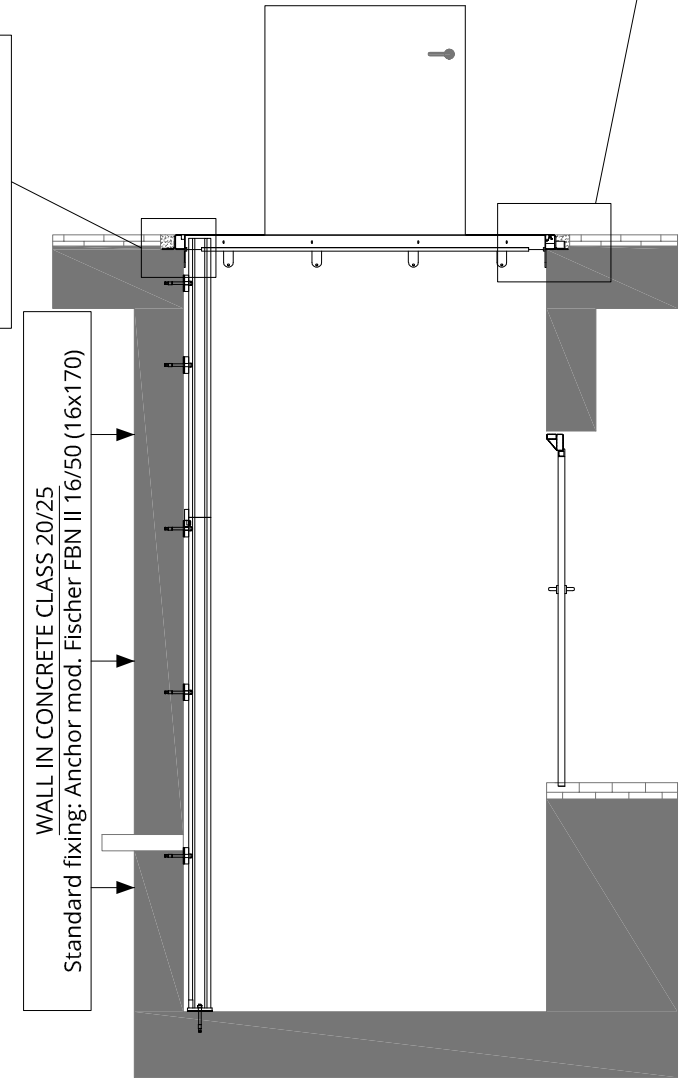


CONCRETE CLASS 20/25

PREDISPORRE TUBO CORRUGATO Ø10cm FINO AL VANO TECNICO

Water drain pipe d.50

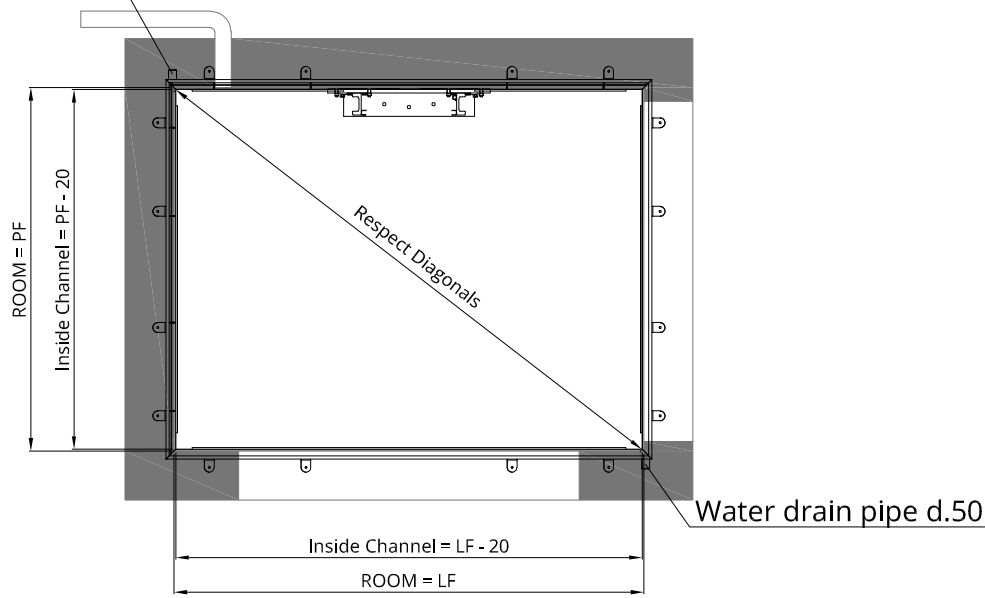

MARK THE ENTRANCES AND THE HEIGHT OF FLOOR

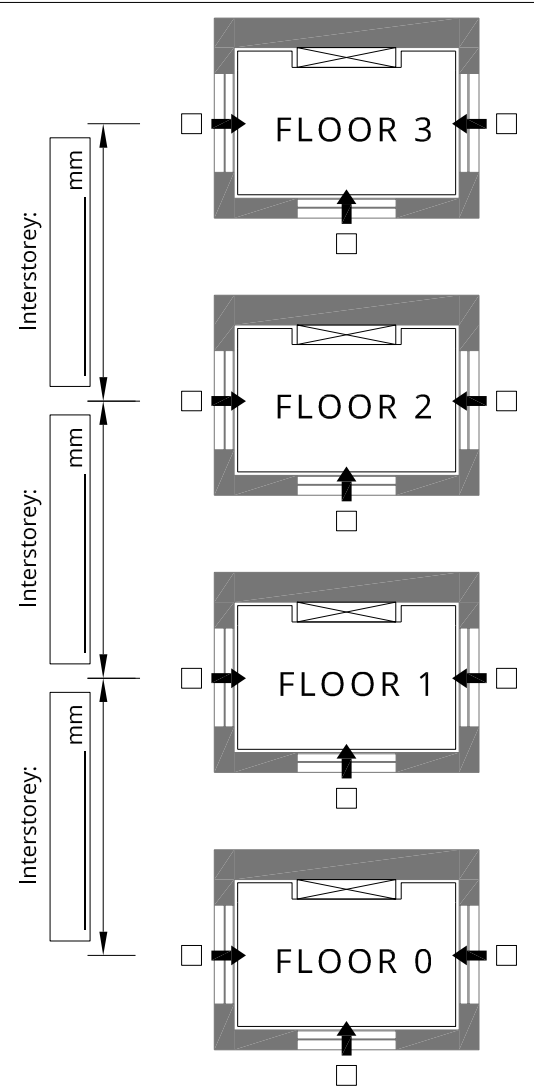


Motor	Tension-functioning	Starter	Suggested switch*	Rated current	Current starter
3kW	220 V - 3ph	Direct	3x16A id=0,3A	10	35
	380 V - 3ph	Direct	4x16A id=0,3A	5	22
4kW	220 V - 3ph	Direct	3x20A id=0,3A	16	50
	380 V - 3ph	Direct	4x16A id=0,3A	8	25
5,5kW	220 V - 3ph	Direct	4x25A id=0,3A	22	60
	380 V - 3ph	Direct	4x16A id=0,3A	11	35

MODEL: UP15RT - 1500Kg UP20RT - 2000Kg


Date: _____ Signature for approval: _____ **CE**

MISURE IN mm

FLATBED DIMENSION (grey area)

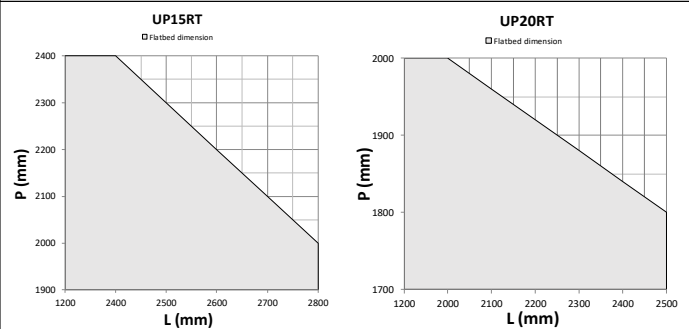

Force on the wall, Fx function of depth flatbed

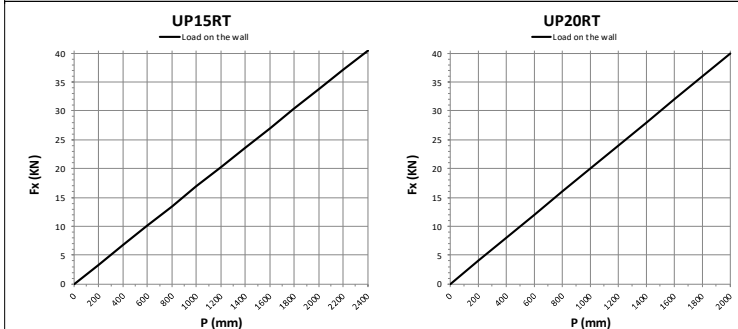

UPDINAMIC Via Modigliani, 22 - 37045 Legnago (VR) - Tel.0442.59.01.29 - Fax. 0442.59.90.91
www.updynamic.com - e-mail: info@updynamic.com

Q.TA DESCRIZIONE: MODEL: UP15-20RT Cliente: _____
Data: 10/09/19
Disegno n°: TAV-UP15-20RT-PIT
Sostituto del: _____
Sostitutore di: _____

STROKE MAX: 12000mm
PIT DETAILS